


精密铸造糖机链及附件 Precision Casting Type Sugar Mill Chains-Attachments

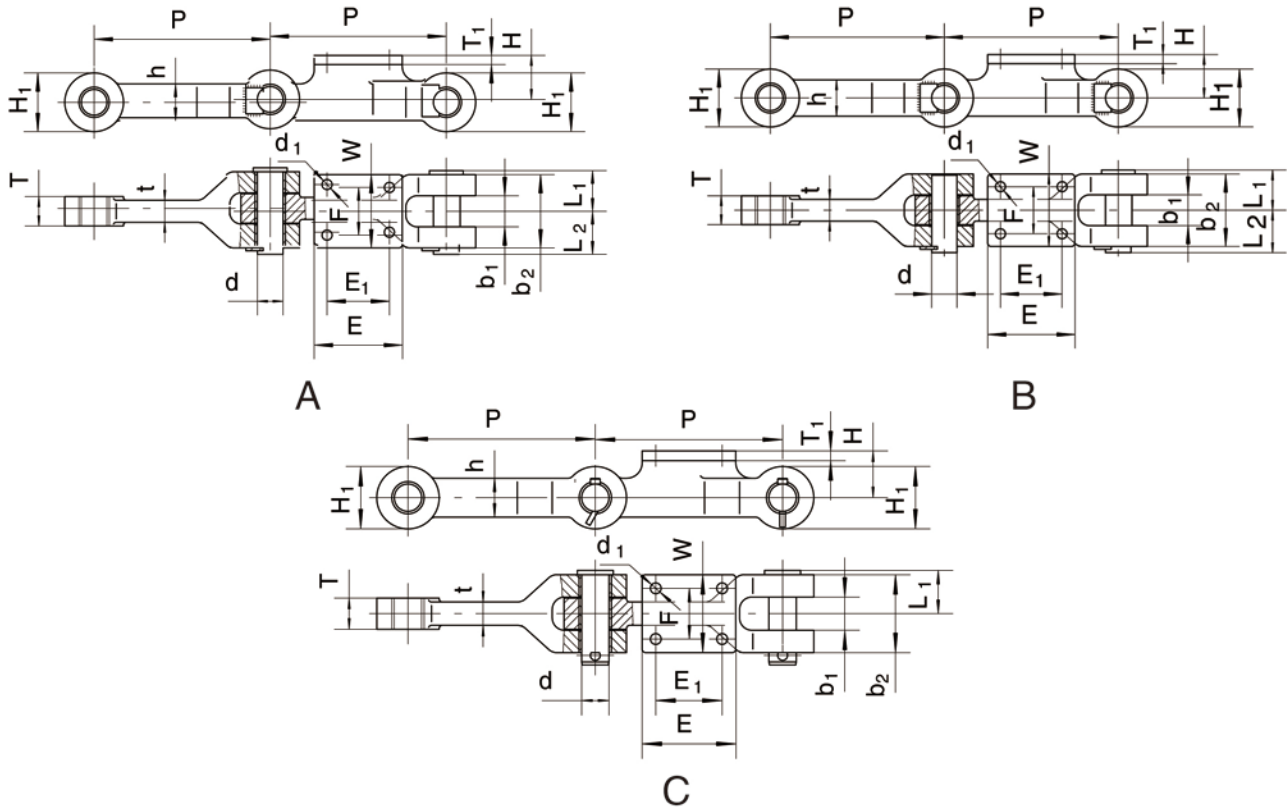

链号	节距	销轴				链板					最小抗拉强度
Chain No.	Pitch	Pin				Sidebar					Ultimate tensile strength
	p	d	L ₁	L ₂	Type	b ₁	b ₂	t	T	h	Fu(min)
	mm	mm	mm	mm		mm	mm	mm	mm	mm	kN
P200	200	38.5	52	58	A	42	92	20	40	75	622.3
P203.2	203.2	38.5	52	58	A	42	92	20.5	40	75	622.3
P228.6	228.6	32	51	69	B	48	102	35	45	50.8	500
P304.8A	304.8	44.5	70.5	75.5	A/C	54	127	38.1	50.8	63.5	880
P304.8B	304.8	44.5	63.5	81.5	B/C	54	127	38.1	50.8	63.5	880

H	H ₁	F	W	T ₁	E ₁	E	d ₁
mm	mm	mm	mm	mm	mm	mm	mm
81.5	75	56	92	16	50	100	17
81.5	75	56.2	92	16.5	50	100	17
66.8	76	70	112	16	76	125	16
76.2	101.6	82.6	127	16	108	152.5	17.5
76.2	101.6	82.6	127	16	108	152.4	17.5

销轴型号为A的链节，两个节距孔内均有衬套，销轴型号为B的链节，仅窄端节距孔内有衬套。

The link of type A pin:two pitch holes all have bushs,and the lind of type B pin:only narrow hole have bush.